



PVC GRIT HOSE

Series(0380~2000)

Applications

- Ship-building yard and ships.
- Suction and discharge for sand, gravel, cement and iron etc.
- Transfer of various powder and granule.
- Suction and press-transfer of various grains.


Characteristics

Soft PVC compound and Rigid PVC helix have been developed specially and produced. Therefore, excellent abrasion heat and cold resistance.

Structure

- The design is similar to the low pressure flexible hose of high flexibility. It is made by fusion adhesion together with the specially developed materials to meet with the properties of abrasion and the duration against tube and cover pressure.

Cross-sectional view

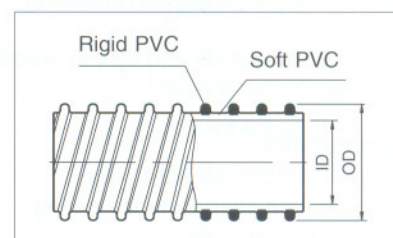

Specification

Nominal Size		I.D		O.D		Std.Length		Bend radius	
mm	inch	mm	inch	mm	inch	m	ft	mm	inch
038	1 1/2	38.1	1.500	49.5	1.948	30	90	150	5.9
050	2	50.8	2.000	61.5	2.421	30	90	160	6.2
065	2 1/2	63.5	2.500	75.5	2.972	30	90	180	7.0
075	3	76.2	3.000	90.2	3.551	30	90	210	8.2
100	4	101.6	4.000	120.6	4.748	30	90	270	10.6
125	5	127.0	5.000	149.0	5.866	20	60	350	13.7
150	6	152.4	6.000	176.4	6.944	20	60	420	16.5
200	8	203.2	8.000	229.2	9.023	20	60	480	18.8